



IQT705 TOUCH compact Industrial-PC



IQT 705 Touch

Compact operating terminal,
Industrial-PC compatible
Compact design with integrated
display and Touch-screen
Panel mounting

- Processor: Pentium 266MHz, low power version
- Memory: up to 128MByte
- Display: Colour-TFT-Display
- Resolution: XGA 1024x768 Pixel,
- Display diagonale: approx. 15 inch
- 'high brightness' CCFT-backlight, 200cd, longlife tube, lifetime 50.000h
- Touchscreen, resistiv, mouse compatible, 1024 x 1024 resolution
- Harddisc: > 3 GByte
- Floppy-disc: 3,5", 1,44MByte, to the back side
- Serial lines:
1 x RS232 (COM1, COM2 reserved for the touch)
- Parallel printer port
- Interface for external keyboard
- Extension sockets for 3xPC104 modules, optional 16 bit ISA-Bus
- Power supply: 24 VDC (-15%...+20%), ca. 70W, alternatively 230VAC
- Dimensions:
482,6x310,3x160 mm (H X B X T)

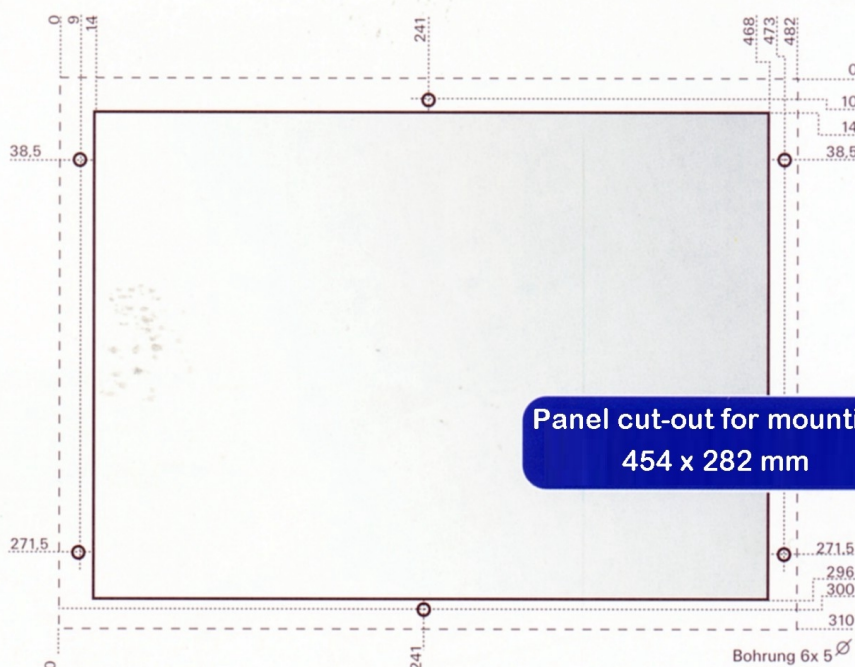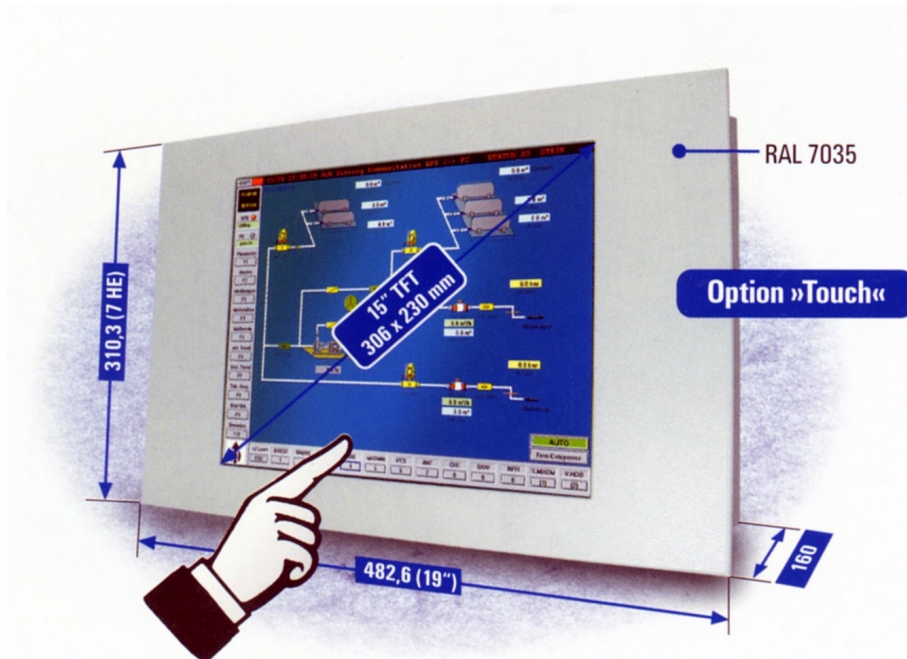

Panel cut-out for mounting
454 x 282 mm